


## Ceiling Lamp

Fashionable ceiling lights with multiple color temperatures can be used in indoor and outdoor scenes such as courtyards, corridors, kitchens and bathrooms. High-quality LED lamp beads have high brightness, good color rendering effect and long service life. The high-transmittance PF lampshade adopts a sealed design, which is dust proof and moisture-proof. Plug-in assembly is convenient and guick.





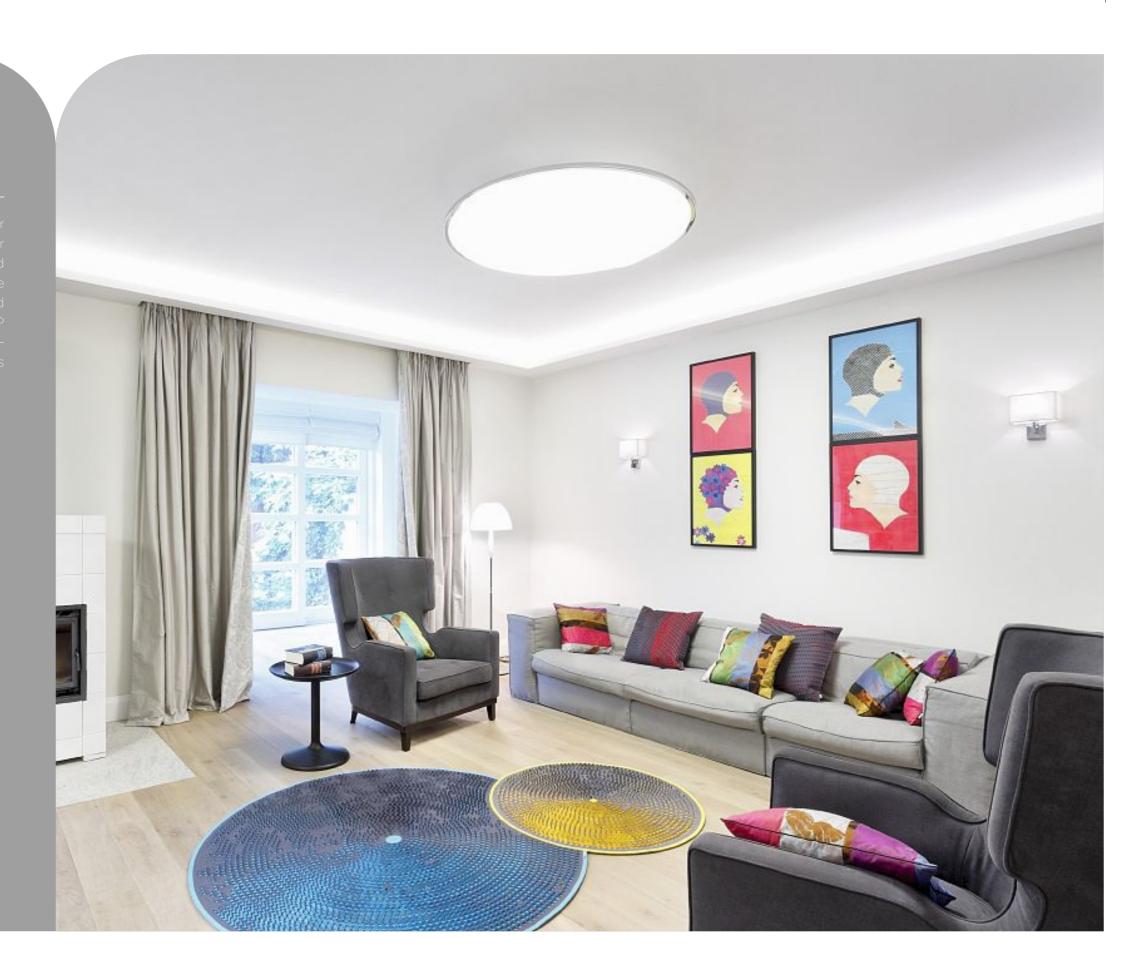

## **Triple Proof Ceiling Light**


## Features:

 Using RCC constant current driver lighting protection and surge protection.

 Integrated injection lamp body and high-transmittance PP lampshade sealed design safe and reliable.


Plug-in assembly for termina 3. installation, easy and convenient.

The product has a wide range of 4.illumination and easy installation, which can be used in a variety of places, such as courtyards, corridors, kitchens and bathrooms, balconies indoors, etc.

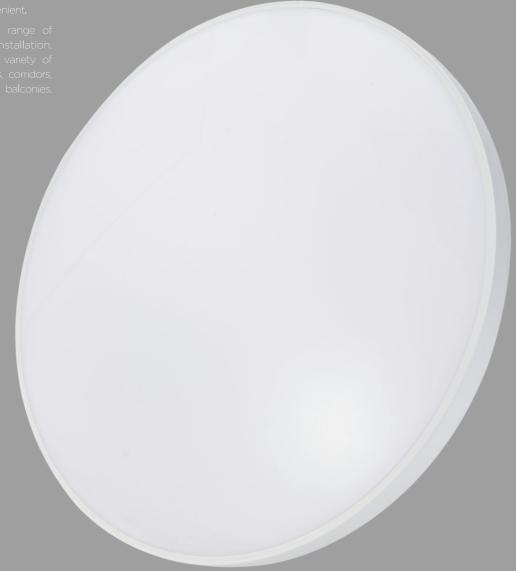



Install the lamp on the ceiling and use an electric drill to drill the hole according to the mounting hole of the chassis, and drive the glue nail into the hole; lead the power cord out of the bracket hole, fix the bracket on the ceiling with self-tapping screws, and make sure it is firm and reliable, and finally Connect the power cord to the terminal block and lock it tightly.



Connect the power cord, and then push the lamp onto the mounting bracket in the direction of the warning label.



Schematic diagram of installation completed

Item No.	Input Voltage	Watts	Lumen	PF	Ra	сст	ΙP	Flicker	Hole Size(mm)	Material	QTY/CTN	Life
0697/0680	AC160-265V	15W	1200lm	0.5	80	4000K/6500K	IP40	NO	ф233*45	PP+ABS	30	25000h
0758/0741	AC160-265V	24W	2000lm	0.5	80	4000K/6500K	IP40	YES	ф298*45	PP+ABS	20	25000h
0819/0802	AC160-265V	36W	3000lm	0.5	80	4000K/6500K	IP40	YES	ф375*46	PP+ABS	20	
0871/0864	AC160-265V	54W	5000lm	0.5	80	4000K/6500K	IP40	YES	ф484*51	PP+ABS	10	25000h
Color for Frame												